## **PCT**

# WORLD INTELLECTUAL PROPERTY ORGANIZATION International Bureau



### INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup>:

A61B 19/00

A1

(11) International Publication Number: WO 96/26681

(43) International Publication Date: 6 September 1996 (06.09.96)

(21) International Application Number: PCT/US96/02580

(22) International Filing Date: 26 February 1996 (26.02.96)

(30) Priority Data: 112816 27 February 1995 (27.02.95) II

(71) Applicant (for all designated States except US): MIGADA, INC. [US/US]; 560 Sylvan Avenue, Englewood Cliffs, NJ 07632 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): SHEMESH, Eli [IL/IL]; 59
Kinneret Street, 77700 Ashdod (IL).

(74) Agents: GALLOWAY, Peter, D. et al.; Ladas & Parry, 26 West 61st Street, New York, NY 10023 (US).

(81) Designated States: AL, AM, AT, AU, AZ, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, US, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).

#### **Published**


With international search report.

Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.

(54) Title: INFUSION BAG WITH INJECTION PORT

#### (57) Abstract

This invention is an infusion bag having an injection port (10) for injecting a substance into an infusion liquid in the infusion bag, characterized in that the injection port is closed by an elastomeric plug (13) which is preformed with a slit (14) for receiving a blunt cannula therethrough to inject said substance into the infusion bag, and which reseals itself after the blunt cannula has been removed, and in that the injection port further includes a separator layer (12) on the inner face of the elastomeric plug, the separator layer being made of a material and of a thickness to be pierceable by a blunt cannula, but when not pierced, to prevent the infusion liquid from reaching and penetrating the slit during autoclaving of the infusion bag to sterilize the infusion liquid therein.



#### FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	ſΤ	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgystan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic	SD	Sudan
CF	Central African Republic		of Korea	SE	Sweden
CG	Congo	KR	Republic of Korea	SG	Singapore
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LR	Liberia	SZ	Swaziland
CS	Czechoslovakia	LT	Lithuania	TD	Chad
CZ	Czech Republic	LU	Luxembourg	TG	Togo
DE	Germany	LV	Latvia	TJ	Tajikistan
DK	Denmark	MC	Monaco	TT	Trinidad and Tobago
EE	Estonia	MD	Republic of Moldova	UA	Ukraine
ES	Spain	MG	Madagascar	UG	Uganda
FI	Finland	ML	Mali	US	United States of America
FR	France	MN	Mongolia	UZ	Uzbekistan
GA	Gabon	MR	Mauritania	VN	Viet Nam

## INFUSION BAG WITH INJECTION PORT

The present invention relates to infusion bags for administering infusion liquids to subjects, and particularly to an infusion bag including a novel injection port construction for injecting a substance into the infusion bag.

Infusion bags filled with an infusion liquid, such as saline water, have to be sterilized and maintained in a sterile condition for a long period of time, in the order of two years. Blunt cannulas are now coming into increasing use in place of hypodermic needles in order to reduce the danger of infection by accidental contact with a contaminated needle. In blunt cannula constructions, the device to be penetrated is closed by an elastomeric plug which is preformed with a slit to accommodate the blunt cannula, but which reseals itself after the blunt cannula has been removed. If such a construction is used in infusion bags, which are sterilized by autoclaving at a high temperature, there is a danger that the high temperature steam produced will deleteriously affect the elastomeric plug, and particularly the slit formation therein, such that the infusion liquid in the bag will not be able to maintain its sterility condition for the required long shelf life.

An object of the present invention is to provide a novel infusion bag having advantages in the above respects.

According to the present invention, there is provided an infusion bag having an injection port for injecting a substance into an infusion liquid in the infusion bag, characterized in that: said injection port is closed by an elastomeric plug which is preformed with a slit for receiving a blunt cannula therethrough to inject said substance into said infusion bag, and which reseals itself after the blunt cannula has been removed; and in that said injection port further includes a separator layer on the inner face of the elastomeric plug, the separator layer being made of a material and of a thickness to be pierceable by a blunt cannula, but when not pierced, to prevent the infusion liquid from reaching and penetrating the slit during autoclaving of the infusion bag to sterilize the infusion liquid therein.

The separator layer is preferably of polyethylene. polyvinyl chloride, nylon or polypropylene; and is preferably of a thickness of 0.05 to 0.30 mm.

According to further features in the preferred embodiments of the invention described below, the injection port is of a tubular configuration joined at its inner end to the infusion

bag and formed at its outer end with an internal annular shoulder receiving the separator layer and the elastomeric plug thereover.

In one described embodiment, the injection port further includes a cap applied over the outer end of the infusion port to retain the elastomeric plug and separator layer. The cap is formed with a central opening aligned with the slit to permit a blunt cannula to be inserted into the plug via the slit for injecting a substance into the infusion bag. In the described preferred embodiment, the central opening in the cap is bordered by inwardly tapering sides of the cap to guide the blunt cannula to the slit.

In a second described embodiment, the outer end of the injection port is integrally formed with an inturned annular rim engaging the peripheral outer face of the elastomeric plug for retaining the plug and the separator layer.

According to an additional feature in the preferred embodiments of the invention described below, the infusion bag further includes a removable, tamper-proof foil applied over the outer face of the plug.

As will be more particularly described below, an infusion bag constructed with the separator layer prevents the infusion liquid within the bag from reaching the elastomeric plug, and particularly from penetrating the slit, when the infusion bag is autoclaved to sterilize the infusion liquid. Such a construction thereby maintains the sterility of the infusion liquid, and the integrity of the elastomeric plug and slit, for the long shelf life required for such infusion bags.

Further features and advantages of the invention will be apparent from the description below.

The invention is herein described, by way of example only, with reference to the accompanying drawings, wherein:

Fig. 1 illustrates one form of infusion bag constructed in accordance with the present invention;

Fig. 2 is an enlarged sectional view illustrating the construction of the injection port in the infusion bag of Fig. 1; and

Fig. 3 is an enlarged sectional view illustrating another construction of the injection port which may be used in the infusion bag of Fig. 1.

The infusion bag illustrated in Fig. 1, and therein generally designated 2, is made of a pliable, transparent plastic material for receiving an infusion liquid, such as saline water. The bag is formed at one end with an opening 4 for suspending the bag at the time of

administering the infusion liquid to a subject. The opposite end of the bag includes a tube defining an infusion port 6 for connection to an infusion tubing assembly through which the infusion liquid within the bag is administered to the subject. The infusion bag 2 further includes another tube 8 defining an injection port, generally designated 10, for injecting a substance into the infusion liquid within the bag, if so desired, before the infusion liquid is administered to the subject.

In the conventional infusion bag constructions, the injection port 10, sometimes called the injection site, is closed by an elastomeric plug or membrane pierced by a hypodermic needle at the time of injecting the substance into the bag. In the construction illustrated in the drawings, the injection port 10 is closed by a pre-slitted elastomeric plug for receiving a blunt cannula to inject the substance into the infusion bag, to thereby reduce the danger of accidental infection by inadvertent contact with a contaminated hypodermic needle. However, when a pre-slitted elastomeric plug is used, there is a danger that the slit in the elastomeric plug, particularly if the infusion bag is sterilized by high-temperature autoclaving, will not maintain its integrity, and thereby the sterility of the infusion liquid within the bag, for the long shelf life (usually at least two years) required for such sterilized infusion bags.

Figs. 2 and 3 illustrate two constructions of the injection port 10 to solve this problem.

The injection port 10 illustrated in Fig. 2 is applied to the outer end of tube 8 joined at its inner end to the infusion bag. Injection port 10 is formed at its outer end with an internal annular shoulder 11. Received on annular shoulder 11 are a separator layer 12, and thereover an elastomeric plug 13, such as of a rubber latex. Plug 13 is preformed with a slit 14 for receiving a blunt cannula (not shown) used to inject a substance into the infusion bag prior to administering the infusion liquid. Slit 14 may extend only partly through plug 13. e.g., terminating just short of its lower face, such that the slitted and unslitted parts are penetrated by the blunt cannula when inserted into the plug. Preferably, however, slit 14 is formed completely through plug 13 to facilitate the insertion of the blunt cannula through the plug.

The elastomeric plug 13, and the underlying separator layer 12, are retained firmly against shoulder 11 of the injection port 10 by a cap 15 applied over the outer end of the injection port 10. Cap 15 is formed with a central opening 16 to permit a blunt cannula (not shown) to be inserted into and through plug 13 via its slit 14 for injecting a substance into the solution bag before the solution therein is administered to the subject. Opening 16 in the cap is bordered by inwardly tapering sides 17 of the cap to guide the blunt cannula to the slit 14. An annular seal 18 is provided between the inner surface of cap 15 and the outer surface of

the outer end of the injection port 10. A removable tamper-proof foil 19 is applied over the outer face of cap 15.

Separator 12 is made of a material and of a thickness which prevent the infusion liquid from reaching and penetrating the preformed slit 14 when the infusion bag is autoclaved at a high temperature (e.g., about 130 C) to sterilize the infusion liquid, but which enable the separator to be easily pierced by a blunt cannula if and when a substance is to be injected into the bag via the injection port. A particularly suitable material for this purpose is polyethylene of a thickness of 0.15 mm. Other materials that may be used are polyvinyl chloride, nylon and polypropylene. Generally, it is preferred to have this separator of a thickness of 0.05 to 0.30 mm.

The separator layer 12 thus isolates the elastomeric plug 13 from the contents of the infusion bag, and therefore permits the infusion bag to be sterilized by autoclaving without danger that the steam produced during the process will reach the elastomeric plug, its preformed slit 14, or the infusion liquid within the bag. The separator layer therefore also maintains the integrity of the elastomeric plug and the slit for a long period of time after sterilization, and thereby maintains the sterile condition of the contents of the infusion bag, for the long shelf life, usually about two years, required for such infusion bags. The tamper-proof foil 19 further protects the plug and the contents of the infusion bag.

Fig. 3 illustrates an alternative construction that may be used for the injection port, therein generally designated 20. The infusion port in Fig. 3 is also formed at its outer end with an internal annular shoulder 21 for receiving thereon the separator 22 and also the elastomeric plug 23, the latter being preformed with a slit 24 as described above with respect to Fig. 2. In this case, however, the separator layer and elastomeric plug are retained by an inturned annular rim 25 integrally formed at the outer end of the tubular injection port 20 and engaging the outer peripheral face of the elastomeric plug 23. Such a rim, therefore, also defines a central opening 26 aligned with the slit 24 to enable the blunt cannula to be inserted into the slit 24 for injecting a substance into the infusion bag. As in Fig. 2, a removable, tamper-proof foil 29, is applied over the outer face of the retainer rim 25 of the elastomeric plug 23.

The construction illustrated in Fig. 3 is otherwise the same, and provides the same advantages, as described above with respect to Fig. 2.

While the invention has been described with respect to two preferred embodiments, it will be appreciated that these are set forth merely for purposes of example, and that many other variations, modifications and applications of the invention may be made.

#### **CLAIMS**

1. An infusion bag having an injection port for injecting a substance into an infusion liquid in the infusion bag, characterized in that:

said injection port is closed by an elastomeric plug which is preformed with a slit for receiving a blunt cannula therethrough to inject said substance into said infusion bag, and which reseals itself after the blunt cannula has been removed;


and in that said injection port further includes a separator layer on the inner face of said elastomeric plug, said separator layer being made of a material and of a thickness to be pierceable by a blunt cannula, but when not pierced, to prevent the infusion liquid from reaching and penetrating the slit during autoclaving of the infusion bag to sterilize the infusion liquid therein.


- 2. The infusion bag according to Claim 1, wherein said separator layer is of polyethylene, polyvinyl chloride, nylon, or polypropylene.
- 3. The infusion bag according to either of Claims 1 or 2, wherein said separator layer is of a thickness of 0.05 to 0.30 mm.
- 4. The infusion bag according to any one of Claims 1-3, wherein said injection port is of tubular configuration joined at its inner end to said infusion bag and formed at its outer end with an internal annular shoulder receiving said separator layer and said elastomeric plug thereover.
- 5. The infusion bag according to any one of Claims 1-4, wherein said elastomeric plug is made of a rubber latex.
- 6. The infusion bag according to Claim 5, wherein said injection port further includes a cap applied over the outer end of the infusion port to retain said elastomeric plug and separator layer; said cap being formed with a central opening aligned with said slit to permit a blunt cannula to be inserted into the plug via said slit for injecting a substance into the infusion bag.
- 7. The infusion bag according to Claim 6, wherein said central opening in said cap is bordered by inwardly tapering sides of the cap to guide the blunt cannula to said slit.
- 8. The infusion bag according to Claim 5, wherein the outer end of said injection port is integrally formed with an inturned annular rim engaging the peripheral outer face of the elastomeric plug for retaining said plug and said separator layer.


9. The infusion bag according to any one of Claims 1-8, wherein the infusion bag further includes a removable, tamper-proof foil applied over the outer face of the plug.

10. The infusion bag according to any one of Claims 1-9, wherein the infusion bag further includes an infusion port for connecting an infusion tubing assembly thereto.

7

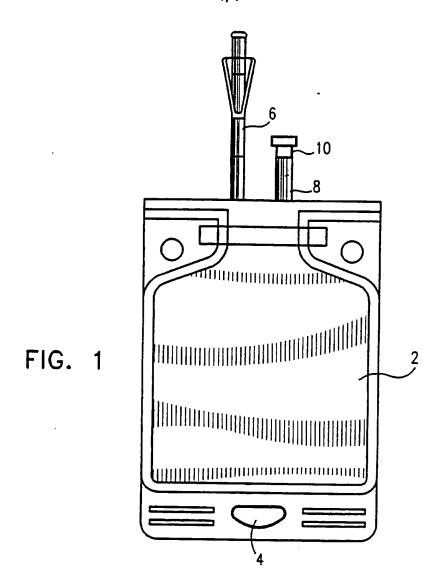

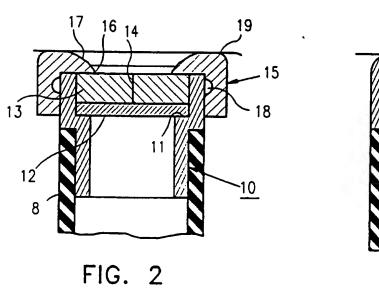



**SUBSTITUTE SHEET (RULE 26)** 

#### INTERNATIONAL SEARCH REPORT

International application No. PCT/US96/02580

		<u></u>		
	ASSIFICATION OF SUBJECT MATTER			
IPC(6)	:A61B 19/00 :604/415			
	to International Patent Classification (IPC) or to be	th national classification and IPC		
	LDS SEARCHED	di dational Cassification and if C		
Minimum e	documentation searched (classification system follow	ved by classification symbols)		
	604/205, 206, 262, 403, 408, 411, 412, 415;	, , , , , , , , , , , , , , , , , , , ,	•	
Documenta	tion searched other than minimum documentation to	the extent that such documents are included	d in the fields searched	
Electronic (	data have consulted during the interestical count			
Discussion (	data base consulted during the international search (	name of data base and, where practicable	, search terms used)	
<u> </u>				
C. DOC	UMENTS CONSIDERED TO BE RELEVANT			
Category*	Citation of document, with indication, where	appropriate, of the relevant passages	Relevant to claim No.	
Y	US A 5 211 638 (DUDAR ET	AL ) 18 May 1002 and	1.10	
·	US, A, 5,211,638 (DUDAR ET Figs. 6-13.	AL.) 18 May 1993, see	1-10	
	<b>3</b> • • • • • • • • • • • • • • • • • • •		1	
<b>′</b>	US, A, 5,188,628 (RANI ET AL	.) 23 February 1993, see	1-10	
	separator layer (27).	, , , , , , , , , , , , , , , , ,		
۱ ۱	US, A, 4,592,092 (MCPHEE) 2	7 May 1986, in regards to	1-10	
	claim 9 see Fig. 2 element (21).	_		
,	110 4 4 500 500 4000000			
١ ١	US, A, 4,596,573 (DONNAN ET	「AL.)24 June 1986, see	1-10	
	all figures.			
Ì				
Ì				
ŀ				
j				
			•	
Furthe	er documents are listed in the continuation of Box (	See patent family annex.		
Spec	init categories of cited documents:	"T" later document published after the inter	mational filing date or necessy	
A* docu	ament defining the general state of the art which is not considered	date and not in conflict with the applica principle or theory underlying the inve	tion but cited to understand the	
	e part of particular relevance or document published on or after the international filing date	"X" document of particular relevance; the	•	
. docu	ment which may throw doubts on priority claim(s) or which is	considered novel or cannot be consider when the document is taken alone	ed to involve an inventive step	
citod	to establish the publication date of another citation or other ial reason (as specified)	"Y" document of particular relevance; the	claimed invention cannot be	
o docu	ment referring to an oral disclosure, use, exhibition or other	considered to involve an inventive combined with one or more other such	step when the document is	
mea. docu	ns ment published prior to the international filing date but later than	being obvious to a person skilled in the		
ibe p	monty date claimed	'&' document member of the same patent i		
ac or the a	ctual completion of the international search	Date of mailing of the international sear	reh report	
17 JULY 1	996	09 AUG 1996		
ame and ma	illing address of the ISA/US	Authorized officer		
	er of Patents and Trademarks	Francisco Company		
Washington.	/	BRUCE E. SNOW		
m PCT/IS.		Telephone No. (703) 308-3255		
nn ru 1/15/	V210 (second sheet)(July 1992)+			

# This Page is Inserted by IFW Indexing and Scanning Operations and is not part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

BLACK BORDERS
☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
☐ FADED TEXT OR DRAWING
☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
☐ SKEWED/SLANTED IMAGES
COLOR OR BLACK AND WHITE PHOTOGRAPHS
☐ GRAY SCALE DOCUMENTS
LINES OR MARKS ON ORIGINAL DOCUMENT
☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
Потигр.

## IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.